


## Pretreat Plus® 0100

*Antiscalant/Dispersant/Antifoulant*

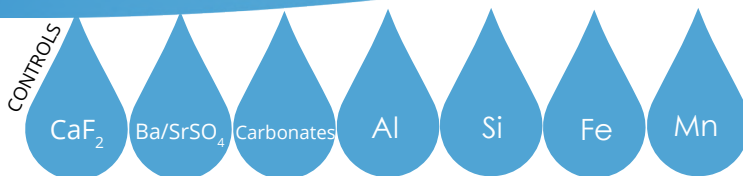

**Pretreat Plus® 0100** is a powerful broad spectrum antiscalant, specially formulated for feedwaters with high levels of scale-forming minerals, as well as metal oxides and silica. It is effective over a wide range of concentrations, and does not flocculate dissolved polymers such as residual coagulants or iron- or aluminum-rich silica. Use of this product is recommended for reducing the operating and capital costs of reverse osmosis (RO) and nanofiltration (NF) systems.

### Features

- Controls inorganic scale over a large concentration range.
- Controls polymerization and precipitation of silica.
- Decreases precipitation of aluminum, iron, and heavy metal salts.
- Compatible with RO, NF, and UF membranes from all major manufacturers.
- Liquid formulation is convenient and easy to use.
- Certified under NSF/ANSI Standard 60 for drinking water production.



#### Dosage

In the typical dosage range of 1–10 mg/L (neat), control of a wide range of inorganic scales at up to 100x saturation values or higher is possible. By monitoring the concentrate stream and trend charts using iWaterPRO™, optimal dosage can be achieved for the control of scales.



#### Specs

Appearance: Clear, Colorless to Light Yellow Liquid  
Product pH (neat): ≤ 2.0

Specific Gravity: 1.06 ± 0.03  
Feedwater pH: 5.0-10.0

### Application

Pretreat Plus® 0100 should be injected into the feed stream prior to the static mixer and cartridge filter. Effective pH range is 5.0-10.0. If frozen, may be thawed and mixed before use.



### Packaging

5 gal (20 kg), 55 gal (220 kg),  
220 gal (969 kg), 275 gal (1211 kg)  
Bulk

