


Cartridge Filters

Pleated Cellulose Sediment Filter Cartridges

Pure Aqua's pleated cellulose sediment filters are constructed from a pleated cellulose media that provides superior depth filtration. The pleated cellulose construction captures particles throughout the entire cross section of the cartridge and reduces surface binding. The cartridges combine quality and cost effectiveness to provide excellent filtration value. Available in a variety of micron ratings and sizes to meet your application needs.

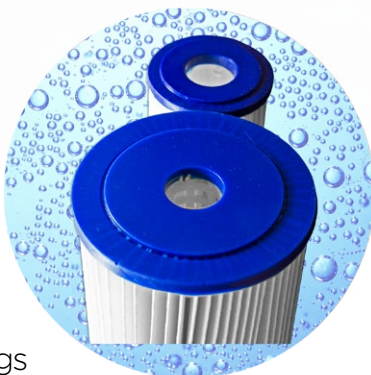

Features & Benefits

- High flow rate
- Low pressure drop
- High dirt holding capacity
- Wide range of micron ratings
- Wide range of lengths
- Washable & reusable

Applications

- Reverse osmosis pre-filtration
- Food & beverage industry
- Potable water
- Electronics
- Residential
- Fine chemicals

2.5" Diameter

Part Number	Micron	Length	Case qty
PP0.2x10	0.2	10	25
PP0.2x20	0.2	20	25
PP0.2x30	0.2	30	25
PP0.2x40	0.2	40	25
PA-101-P	1	9-7/8"	50
PA-201-P	1	20"	25
PA-301-P	1	30"	25
PA-401-P	1	40"	25
PA-105-P	5	9-7/8"	50
PA-205-P	5	20"	25
PA-305-P	5	30"	25
PA-405-P	5	40"	25
PA-1020-P	20	9-7/8"	50
PA-2020-P	20	20"	25
PA-1050-P	50	9-7/8"	25
PA-2050-P	50	20"	25

Specifications

Material (media)	Pleated Cellulose	
Material (end caps)	Vinyl Plastisol	
Material (core)	Polypropylene	
Length	9-7/8" - 40"	
Maximum temperature	60°C / 140°F	
Micron rating (nominal)	0.2 - 50	
Maximum flow rate	5 - 28 gpm (2.5" diameter)	10 - 30 gpm (4.5" Diameter)
Cartridge packaging	Shrink wrapped	

4.5" Diameter

Part Number	Micron	Length	Case qty
PA-101-BP	1	9-7/8"	8
PA-201-BP	1	20"	6
PA-105-BP	5	9-7/8"	8
PA-205-BP	5	20"	6
PA-1020-BP	20	9-7/8"	8
PA-2020-BP	20	20"	6
PA-1050-BP	50	9-7/8"	8
PA-2050-BP	50	20"	6



Pure Aqua, Inc.®

Water Treatment and Reverse Osmosis Systems

sales@pureaqua.com

www.pureaqua.com

Tel: +1-714-432-9996

Fax: +1-714-432-9898



Authorized Dealer: